



Compression Style Pneumatic



Compression

*Thermoplastic /
Soft Metal Tubing
Economical
UL Listed*



Compress-Align®

*Pre-assembled
Captive Sleeve
Two piece*



Parker Metru-Lok™

*NPT, BSPT, BSPP,
Metric Threads
Captive Sleeve
Metric Tubing*



Poly-Tite

*Built-in Tube Support
Captive Sleeve
Knurled Nut*





Hi-Duty

*Higher Pressure Rating
Two Piece Design
Easy Assembly*



A

Tube to Male NPTF	68C Male Connector	68CA Male Connector	68P Male Connector	68HD Male Connector	682C Tank Fitting	682CA Tank Fitting	
							
	Page A7	Page A12	Page A26	Page A32	Page A9	Page A14	
	169C-269C Male Elbow	169CA-269CA Male Elbow	169P/269P Male Elbow	169LP Long Elbow	169PS Male Elbow	169HD Male Elbow	179C 45° Male Elbow
							
	Page A8	Page A13	Page A28	Page A28	Page A28	Page A32	Page A9
179CA 45° Male Elbow	179HD 45° Male Elbow	172C Male Branch Tee	172CA Male Branch Tee	172P Male Branch Tee	172HD Male Branch Tee	171C Male Run Tee	
							
Page A14	Page A32	Page A9	Page A13	Page A29	Page A32	Page A9	
171CA Male Run Tee	171P Male Run Tee	171HD Male Run Tee	168C Gauge Tee	168CA Gauge Tee	176C Adaptor	176CA Adaptor	
							
Page A13	Page A29	Page A32	Page A8	Page A13	Page A9	Page A14	
NV311P Needle Valve	NV312P Needle Valve	Tube to Female NPT		66C Female Connector	66CA Female Connector	66P Female Connector	66HD Female Connector
							
Page A29	Page A29			Page A7	Page A12	Page A25	Page A31
177C Female Tee	177CA Female Tee	177HD Female Tee	177P Female Tee	170C-270C Female Elbow	170CA-270CA Female Elbow	170P Female Elbow	
							
Page A9	Page A14	Page A33	Page A29	Page A9	Page A13	Page A29	
170HD Female Elbow	Tube to Tube		62C Union	62CA Union	62P Union	62HD Union	62PCA Union
							
Page A32			Page A6	Page A11	Page A24	Page A31	Page A11
164C-264C Union Tee	164CA-264CA Union Tee	164P Union Tee	164HD Union Tee	165C-265C Union Elbow	165CA-265CA Union Elbow	165HD Union Elbow	
							
Page A8	Page A12	Page A28	Page A31	Page A8	Page A12	Page A31	

Bulkhead Unions	62CBH Bulkhead Union  Page A7	62CABH Bulkhead Union  Page A11	62PCABH Bulkhead Union  Page A11, A25	62HDBH Bulkhead Union  Page A31	62PBH Bulkhead Union  Page A25	62PTBH Bulkhead Union  Page A25
	61C Nut  Page A6	61CL Long Nut  Page A6	61CA Nut/Sleeve  Page A11	61HD Nut/Sleeve  Page A31	61P Nut/Plastic Sleeve  Page A24	61PB Nut/Brass Sleeve  Page A24
61PN Nut Only  Page A24	60C Sleeve  Page A6	60PT Plastic Sleeve  Page A6	60P Plastic Sleeve  Page A24	60PB Brass Sleeve  Page A24	61PSGN Spring Gaurd Nut  Page A24	63PT Tube Support  Page A7, A25
639C Seal Plug  Page A9	59CA Plug  Page A11	639CA Seal Plug  Page A14	56PSG Spring Gaurd  Page A24	59HD Plug  Page A33	59P Plug  Page A24	
Couplers	391P & 391PSS Coupler Body  Page A26	392P & 392PSS Bulkhead Body  Page A26	393P & 393PSS Through Insert  Page A26	393PD & 393PDSS Shutoff Insert  Page A27	394P & 394PSS Single Shutoff  Page A27	394PD & 394PDSS Double Shutoff  Page A27
	398P & 398PSS Single Shutoff  Page A27	398PD & 398PDSS Double Shutoff  Page A28	Tube Stub			
			97P Tube End Reducer  Page A26			

A

Metric Tube to Male NPTF	FBMB Male Connector  Page A16	CBMB Male Elbow  Page A17	SBMB Male Branch Tee  Page A19	RBMB Male Run Tee  Page A18	T2HFB Tube End Adaptor  Page A20		
	GBMB Female Connector  Page A17	Metric Tube to Metric Tube	HBMB Union  Page A16	JBMB Union Tee  Page A18	EBMB Union Elbow  Page A18	KBMB Union Cross  Page A19	
	WBMB Bulkhead Union  Page A17		WBMPB Bulkhead Union  Page A17	Metric Auxiliary Components	BMB Nut  Page A21	BTMB Nut/Sleeve  Page A21	TMB Sleeve  Page A21
Metric Bulkhead Unions	FNMB Cap  Page A21	PNMB Plug  Page A21	TRMB Tube End Reducer  Page A22		T23UB Tube Support  Page A22	Metric Tube Stubs	T23HFB Tube Stub/BSPT  Page A20
	T2HGB Female Tube Stub  Page A20	T24HGB Female BSPP  Page A21	Metric Tube to BSPT	F3BMB Male Connector  Page A16	C3BMB Male Elbow  Page A18		R3BMB Male Run Tee  Page A19
	Metric Tube to BSPP	F4BMB Male Connector  Page A16		G4BMB Female Connector  Page A17	COR4BMB Single Banjo  Page A19	Metric Tube to Metric Straight Thread	F8BMB Male Connector  Page A16



Compression Fittings

A

MATERIALS OF CONSTRUCTION	
FITTINGS:	BRASS
NUTS:	BRASS
SLEEVES:	BRASS OR ACETAL

NOMENCLATURE	
EXAMPLE: 169C-6-4	ATTRIBUTE:
1	FORGING
2 (NOT SHOWN)	EXTRUSION (2)
69	MALE ELBOW
C	COMPRESSION
6	3/8 TUBE O.D.
4	1/4 PIPE THREAD

PRESSURE RANGE @73°F		
PSI	TUBE O.D. (IN.)	TUBE WALL (IN.)
400	1/8	.030
400	9/16	.030
300	1/4	.030
300	5/16	.032
200	3/8	.032
200	1/2	.032
150	5/8	.035
100	3/4	.035
75	7/8	.035

APPLICABLE TUBE	
TUBE MATERIAL:	COPPER, ALUMINUM, THERMOPLASTIC TUBING
TUBE O.D.:	1/8, 3/16, 1/4, 5/16, 3/8, 1/2, 5/8, 3/4, 7/8

SPECIFICATIONS	
OPERATING FLUID:	WATER, AIR, INERT AND NON-COMBUSTIBLE GASES COMPATIBLE WITH MATERIALS OF CONSTRUCTION
TEMPERATURE RANGES:	FROM -65° TO +250°F.
NOTE:	FOR OTHER TYPES OF FLUIDS OR GASES, PLEASE CONSULT FACTORY



No flaring, soldering or other preparation of tubing necessary to assemble. Listed with Underwriter's Laboratories for flammable liquid. Compression fittings meet functional requirements of SAE J-512.


Assembly Instructions

1. Slide nut, then sleeve onto tubing. The thread end of the nut must face out.
2. Insert the tube into the fitting. Be sure the tube is bottomed on the fitting shoulder.
3. Assemble nut to body, and tighten "hand-tight". Then follow the number of wrench turns as indicated in the following table.


FITTING SIZE	TUBE SIZE	TURNS REQUIRED TO SEAL FROM HAND-TIGHT	
		60C WITH SOFT METAL TUBING	60PT WITH THERMOPLASTIC TUBING
2	1/8	1-1/4	—
3	3/16	1-1/4	—
4	1/4	1-1/4	2
5	5/16	1-1/4	2
6	3/8	2-1/4	2
8	1/2	2-1/4	2
10	5/8	2-1/4	2
12	3/4	2-1/4	2
14	7/8	2-1/4	—

A**Sleeve 60C**

REF. SAE 060115




PART NO.	TUBE SIZE	A	D	L
60C-2	1/8	.187	.130	.19
60C-3	3/16	.266	.192	.22
60C-4	1/4	.344	.255	.25
60C-5	5/16	.406	.318	.25
60C-6	3/8	.469	.382	.25
60C-7	7/16	.531	.444	.31
60C-8	1/2	.594	.507	.38
60C-10	5/8	.719	.632	.38
60C-12	3/4	.875	.758	.44
60C-14	7/8	1.000	.883	.41

Acetal Sleeve 60PT

PART NO.	PLASTIC TUBE WALL	TUBE WALL	A	D	L
60PT-4	1/4	.040	.375	.254	.19
60PT-5	5/16	.062	.438	.317	.19
60PT-6	3/8	.062	.500	.379	.19
60PT-8	1/2	.062	.631	.507	.25
60PT-10	5/8	.062	.747	.632	.22
60PT-12	3/4	.062	.931	.760	.25

Nut 61C


REF. SAE 060110



PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	D	L
61C-2	1/8	5/16-24	3/8	.130	.38
61C-3	3/16	3/8-24	7/16	.192	.41
61C-4	1/4	7/16-24	1/2	.255	.44
61C-5	5/16	1/2-24	9/16	.318	.44
61C-6	3/8	9/16-24	5/8	.382	.47
61C-7	7/16	5/8-24	11/16	.444	.50
61C-8	1/2	11/16-20	13/16	.507	.62
61C-10	5/8	13/16-18	15/16	.632	.62
61C-12	3/4	1-18	1-3/16	.758	.69
61C-14	7/8	1-1/8-18	1-1/4	.890	.62

Long Nut 61CL


REF. SAE 060111



PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	D	L
61CL-4	1/4	7/16-24	1/2	.255	.75
61CL-5	5/16	1/2-24	9/16	.318	.84
61CL-6	3/8	9/16-24	5/8	.382	.97
61CL-8	1/2	11/16-20	13/16	.507	1.06
61CL-10	5/8	13/16-18	15/16	.632	1.19
61CL-12	3/4	1-18	1-3/16	.758	1.38

Union 62C


REF. SAE 060101 BA



PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	L	M	FLOW DIA. D
62C-2	1/8	5/16-24	5/16	1.05	.64	.094
62C-3	3/16	3/8-24	3/8	1.21	.72	.125
62C-4	1/4	7/16-24	7/16	1.33	.79	.188
62C-5	5/16	1/2-24	1/2	1.39	.85	.250
62C-6	3/8	9/16-24	9/16	1.52	.97	.312
62C-7	7/16	5/8-24	5/8	1.70	1.02	.312
62C-8	1/2	11/16-20	11/16	1.90	1.08	.406
62C-10	5/8	13/16-18	13/16	2.06	1.23	.500
62C-12	3/4	1-18	1	2.37	1.41	.562
62C-14	7/8	1-1/8-18	1-1/8	2.07	1.19	.766


Union Reducers 62C

REF. SAE 060101 BA



PART NO.	1 TUBE SIZE	2 TUBE SIZE	1 STRAIGHT THREAD	2 STRAIGHT THREAD	C HEX	L	M	FLOW DIA. D
62C-4-3	3/16	1/4	3/8-24	7/16-24	7/16	1.29	.78	.125
62C-6-4	1/4	3/8	7/16-24	9/16-24	9/16	1.46	.91	.188
62C-8-6	3/8	1/2	9/16-24	11/16-20	11/16	1.71	1.03	.312
62C-10-6	3/8	5/8	9/16-24	13/16-18	13/16	1.82	1.13	.312


Bulkhead Union 62CBH



PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	L	M	BULKHEAD HOLE DIA.	FLOW DIA. D
62CBH-4	1/4	7/16-24	9/16	2.29	1.75	7/16	.188
62CBH-6	3/8	9/16-24	11/16	2.42	1.88	9/16	.312

Brass Insert 63PT

(For industrial grade plastic tubing)




PART NO.	TUBE O.D.	TUBE WALL	L	O.D.
63PT-2-16	1/8	.016	.46	.080
63PT-2-23	1/8	.023	.45	.073
63PT-2-32	1/8	.032	.31	.061
63PT-3-25	3/16	.025	.45	.135
63PT-3-40	3/16	.040	.52	.095
63PT-4-40	1/4	.040	.50	.163
63PT-4-62	1/4	.062	.33	.110
63PT-5-40	5/16	.040	.50	.232
63PT-5-62	5/16	.062	.53	.187
63PT-6-62	3/8	.062	.56	.250
63PT-8-62	1/2	.062	.72	.370
63PT-10-62	5/8	.062	.72	.483

For plastic tubing

Acetal Sleeve 60PT and Brass Insert 63PT converts standard compression fittings for use with industrial grades of thermoplastic tubing.

Female Connector 66C


REF. SAE 060103 BA



PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	C HEX	L	M	FLOW DIA. D
66C-2-2	1/8	1/8	5/16-24	9/16	.95	.75	.094
66C-3-2	3/16	1/8	3/8-24	9/16	1.02	.78	.125
66C-3-4	3/16	1/4	3/8-24	11/16	1.20	.96	.125
66C-4-2	1/4	1/8	7/16-24	9/16	1.02	.78	.188
66C-4-4	1/4	1/4	7/16-24	11/16	1.24	1.00	.188
66C-5-2	5/16	1/8	1/2-24	9/16	1.07	.81	.250
66C-5-4	5/16	1/4	1/2-24	11/16	1.29	1.03	.250
66C-6-2	3/8	1/8	9/16-24	9/16	1.06	.78	.312
66C-6-4	3/8	1/4	9/16-24	11/16	1.34	1.06	.312
66C-6-6	3/8	3/8	9/16-24	13/16	1.34	1.06	.312
66C-6-8	3/8	1/2	9/16-24	1	1.54	1.27	.312
66C-7-6	7/16	3/8	5/8-24	13/16	1.43	1.09	.312
66C-8-4	1/2	1/4	11/16-20	11/16	1.49	1.09	.406
66C-8-6	1/2	3/8	11/16-20	13/16	1.52	1.12	.406
66C-8-8	1/2	1/2	11/16-20	1	1.71	1.31	.406
66C-10-8	5/8	1/2	13/16-18	1	1.80	1.38	.500

Male Connector 68C

REF. SAE 060102 BA




PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	C HEX	L	M	FLOW DIA. D
68C-2-1	1/8	1/16	5/16-24	11/32	.99	.78	.095
68C-2-2	1/8	1/8	5/16-24	7/16	.97	.77	.094
68C-3-1	3/16	1/16	3/8-24	3/8	1.08	.84	.125
68C-3-2	3/16	1/8	3/8-24	7/16	1.08	.84	.125
68C-3-4	3/16	1/4	3/8-24	9/16	1.27	1.03	.125
68C-4-2	1/4	1/8	7/16-24	7/16	1.10	.86	.188
68C-4-4	1/4	1/4	7/16-24	9/16	1.30	1.06	.188
68C-4-6	1/4	3/8	7/16-24	11/16	1.27	1.03	.188
68C-4-8	1/4	1/2	7/16-24	7/8	1.55	1.31	.188
68C-5-2	5/16	1/8	1/2-24	1/2	1.15	.89	.234
68C-5-4	5/16	1/4	1/2-24	9/16	1.33	1.07	.250
68C-6-2	3/8	1/8	9/16-24	9/16	1.25	.97	.250
68C-6-4	3/8	1/4	9/16-24	9/16	1.42	1.14	.312
68C-6-6	3/8	3/8	9/16-24	11/16	1.44	1.16	.312
68C-6-8	3/8	1/2	9/16-24	7/8	1.53	1.25	.312
68C-7-4	7/16	1/4	5/8-24	5/8	1.50	1.17	.312
68C-8-4	1/2	1/4	11/16-20	11/16	1.60	1.20	.312
68C-8-6	1/2	3/8	11/16-20	11/16	1.60	1.20	.406
68C-8-8	1/2	1/2	11/16-20	7/8	1.71	1.31	.406
68C-10-6	5/8	3/8	13/16-18	13/16	1.73	1.31	.406
68C-10-8	5/8	1/2	13/16-18	7/8	1.90	1.48	.500
68C-10-12	5/8	3/4	13/16-18	1-1/16	1.98	1.56	.500
68C-12-8	3/4	1/2	1-18	1	2.05	1.60	.562
68C-12-12	3/4	3/4	1-18	1-1/16	2.08	1.63	.656
68C-14-12	7/8	3/4	1-1/8-18	1-1/8	1.76	1.41	.750

A

Union Tee 164C-264C


REF. SAE 060401 BA



PART NO.	TUBE SIZE	STRAIGHT THREAD	L	M	FLOW DIA. D
164C-2	1/8	5/16-24	.82	.61	.094
264C-3	3/16	3/8-24	.84	.60	.125
164C-4	1/4	7/16-24	.86	.63	.188
264C-4	1/4	7/16-24	.84	.60	.188
164C-5	5/16	1/2-24	.98	.71	.250
164C-6	3/8	9/16-24	1.03	.74	.312
164C-8	1/2	11/16-20	1.34	.93	.406
164C-10	5/8	13/16-18	1.54	1.08	.500
164C-12	3/4	1.00-18	1.65	1.17	.563

Union Tee 164C-264C Combination Sizes


REF. SAE 060401 BA



PART NO.	1 TUBE SIZE	2 TUBE SIZE	3 TUBE SIZE	L1	L2	L3	M1	M2	M3	FLOW DIA. D
164C-6-4-4	3/8	1/4	1/4	1.03	.96	.96	.75	.72	.72	.188
164C-6-6-4	3/8	3/8	1/4	1.03	.96	.96	.75	.75	.72	.188
164C-8-8-6	1/2	1/2	3/8	1.34	1.16	1.16	.94	.94	.88	.312


Union Elbow 165C-265C

REF. SAE 060201 BA



PART NO.	TUBE SIZE	STRAIGHT THREAD	L	M	FLOW DIA. D
165C-2	1/8	5/16-24	.82	.61	.094
165C-3	3/16	3/8-24	.87	.61	.125
165C-4	1/4	7/16-24	.88	.61	.188
265C-4	1/4	7/16-24	.84	.60	.188
165C-5	5/16	1/2-24	.95	.71	.250
165C-6	3/8	9/16-24	1.03	.74	.312
165C-7	7/16	5/3-24	1.16	.82	.312
165C-8	1/2	11/16-20	1.34	.93	.406
165C-10	5/8	13/16-18	1.48	1.05	.500
165C-12	3/4	1-18	1.65	1.17	.563


Compression Gage Tee 168C



PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	N1	FLOW DIA. D
168C-4-2	1/4	1/8	7/16-24	.96	.72	1.41	.56	.188

Male Elbow 169C-269C


REF. SAE 060202 BA



PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
169C-2-1	1/8	1/16	5/16-24	.81	.60	.67	.095
269C-2-2	1/8	1/8	5/16-24	.80	.60	.67	.094
169C-3-1	3/16	1/16	3/8-24	.85	.61	.67	.126
169C-3-2	3/16	1/8	3/8-24	.84	.61	.69	.125
269C-3-2	3/16	1/8	3/8-24	.84	.60	.67	.125
169C-3-4	3/16	1/4	3/8-24	.86	.64	.93	.125
169C-4-2	1/4	1/8	7/16-24	.86	.61	.74	.188
269C-4-2	1/4	1/8	7/16-24	.84	.60	.73	.188
169C-4-4	1/4	1/4	7/16-24	.86	.62	.94	.188
269C-4-4	1/4	1/4	7/16-24	.84	.60	.79	.188
169C-4-6	1/4	3/8	7/16-24	.93	.68	1.00	.188
169C-5-2	5/16	1/8	1/2-24	.88	.61	.74	.234
269C-5-2	5/16	1/8	1/2-24	.86	.60	.73	.250
169C-5-4	5/16	1/4	1/2-24	.95	.71	.93	.250
269C-5-4	5/16	1/4	1/2-24	.93	.67	.82	.250
169C-5-6	5/16	3/8	1/2-24	1.01	.75	1.00	.250
169C-6-2	3/8	1/8	9/16-24	1.03	.74	.74	.234
269C-6-2	3/8	1/8	9/16-24	.97	.69	.75	.220
169C-6-4	3/8	1/4	9/16-24	1.03	.74	.93	.312
269C-6-4	3/8	1/4	9/16-24	1.01	.73	.92	.312
169C-6-6	3/8	3/8	9/16-24	1.03	.75	1.00	.312
269C-6-6	3/8	3/8	9/16-24	1.12	.84	.97	.312
169C-6-8	3/8	1/2	9/16-24	1.22	.94	1.27	.312
269C-7-6	7/16	3/8	5/8-24	1.16	.82	.98	.312
169C-8-4	1/2	1/4	11/16-20	1.34	.94	1.00	.312
169C-8-6	1/2	3/8	11/16-20	1.34	.93	1.11	.406
169C-8-8	1/2	1/2	11/16-20	1.48	1.00	1.37	.406
169C-10-8	5/8	1/2	13/16-18	1.48	1.06	1.31	.500
169C-12-8	3/4	1/2	1-18	1.64	1.18	1.49	.562
169C-12-12	3/4	3/4	1-18	1.70	1.27	1.58	.562

Female Elbow 170C-270C


REF. SAE 060203 BA



PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
170C-2-2	1/8	1/8	5/16-24	.89	.69	.56	.094
170C-3-2	3/16	1/8	3/8-24	.98	.69	.56	.125
170C-4-2	1/4	1/8	7/16-24	.93	.69	.56	.188
270C-4-2	1/4	1/8	7/16-24	.91	.67	.54	.188
170C-4-4	1/4	1/4	7/16-24	1.02	.78	.67	.188
170C-6-4	3/8	1/4	9/16-24	1.06	.79	.73	.312
170C-6-6	3/8	3/8	9/16-24	1.22	.89	.69	.312
170C-7-4	7/16	1/4	5/8-24	1.27	.93	.73	.312
170C-8-6	1/2	3/8	11/16-20	1.34	1.00	.69	.406
170C-8-8	1/2	1/2	11/16-20	1.56	1.15	.97	.408
170C-12-12	3/4	3/4	1-18	2.06	1.58	1.58	.560

Male Run Tee 171C


REF. SAE 060424 BA



PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
171C-2-2	1/8	1/8	5/16-24	.82	.61	.67	.094
171C-3-2	3/16	1/8	3/8-24	.86	.61	.67	.125
171C-4-2	1/4	1/8	7/16-24	.90	.64	.75	.188
171C-4-4	1/4	1/4	7/16-24	.93	.69	.92	.188
171C-6-4	3/8	1/4	9/16-24	1.09	.81	1.03	.312


Male Branch Tee 172C

REF. SAE 060425 BA




PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
172C-2-2	1/8	1/8	5/16-24	.82	.61	.67	.094
172C-3-2	3/16	1/8	3/8-24	.86	.61	.67	.125
172C-4-2	1/4	1/8	7/16-24	.86	.61	.74	.188
172C-4-4	1/4	1/4	7/16-24	.93	.69	.92	.188
172C-6-2	3/8	1/8	9/16-24	1.03	.75	.75	.234
172C-6-4	3/8	1/4	9/16-24	1.09	.77	.92	.312
172C-6-6	3/8	3/8	9/16-24	1.09	.81	1.00	.312
172C-8-6	1/2	3/8	11/16-20	1.34	.93	1.10	.406

Adapter Tee 176C



PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	N1	FLOW DIA. D
176C-4-2	1/4	1/8	7/16-24	.93	.69	.75	.66	.188


Female Branch Tee 177C



PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
177C-4-2	1/4	1/8	7/16-24	.86	.63	.53	.188


45° Elbow 179C

Compression to male pipe




PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
179C-4-2	1/4	1/8	7/16-24	.90	.66	.56	.188
179C-4-4	1/4	1/4	7/16-24	.80	.56	.84	.188
179C-6-2	3/8	1/8	9/16-24	.90	.63	.65	.234
179C-6-4	3/8	1/4	9/16-24	.90	.63	.84	.312
179C-6-6	3/8	3/8	9/16-24	.97	.75	.95	.312
179C-8-6	1/2	3/8	11/16-24	1.15	.81	.95	.406

Seal Plug 639C



PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	L	M
639C-4	1/4	7/16-24	7/16	.74	.50

Straight Through Tank Fitting 682C



PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	C HEX	L	M	FLOW DIA. D
682C-3-2	3/16	1/8	3/8-24	7/16	1.06	0.84	.195
682C-6-6	3/8	3/8	9/16-24	11/16	1.44	1.16	.387
682C-8-8	1/2	1/2	11/16-20	7/8	1.90	1.31	.516



A

Compress-Align® Fittings

MATERIALS OF CONSTRUCTION	
FITTINGS:	BRASS
NUTS:	BRASS

NOMENCLATURE	
EXAMPLE: 269CA-6-4	ATTRIBUTE:
1 (NOT SHOWN)	FORGING (1)
2	EXTRUSION
69	MALE ELBOW
CA	COMPRESS-ALIGN
6	3/8 TUBE O.D.
4	1/4 PIPE THREAD

PRESSURE RANGE		
PSI	TUBE O.D. (IN.)	TUBE WALL (IN.)
2800	1/8	.030
1900	3/16	.030
1400	1/4	.030
1200	5/16	.032
1000	3/8	.032
750	1/2	.032
650	5/8	.035
550	3/4	.035
450	7/8	.035
350	1	.035

APPLICABLE TUBE	
TUBE MATERIAL:	COPPER, ALUMINUM, TFE, FEA, PFA, THERMOPLASTIC TUBING
TUBE O.D.:	1/8, 3/16, 1/4, 5/16, 3/8, 1/2, 5/8, 3/4, 1

SPECIFICATIONS	
OPERATING FLUID:	WATER, AIR, INERT AND NON-COMBUSTIBLE GASSES COMPATIBLE WITH MATERIALS OF CONSTRUCTION
TEMPERATURE RANGES:	FROM -65° TO +250°F.
NOTE:	FOR OTHER TYPES OF FLUIDS OR GASSES, PLEASE CONSULT FACTORY




No flaring, soldering or other preparation of tubing is necessary. Preassembled fitting, with captive sleeve. Sleeve is always oriented for correct installation, visible for inspection before and after installation.

Assembly Instructions

With nut finger tight on fitting body, insert tubing until it bottoms in the fitting. Complete the seal with one wrench turn on all sizes.

Plug 59CA




PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	L
59CA-4	1/4	7/16-24	1/2	.40
59CA-6	3/8	9/16-24	5/8	.45
59CA-8	1/2	11/16-20	13/16	.50

Nut and Sleeve Assembly 61CA




PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	D	L
61CA-2	1/8	5/16-24	3/8	.130	.36
61CA-3	3/16	3/8-24	7/16	.194	.38
61CA-4	1/4	7/16-24	1/2	.255	.40
61CA-5	5/16	1/2-24	9/16	.318	.45
61CA-6	3/8	9/16-24	5/8	.382	.45
61CA-8	1/2	11/16-20	13/16	.507	.50
61CA-10	5/8	13/16-18	15/16	.632	.53
61CA-12	3/4	1-18	1-3/16	.760	.56
61CA-14	7/8	1-1/8-18	1-3/8	.885	.68
61CA-16	1	1-1/4-18	1-1/2	1.012	.63

Union 62CA




PART NO.	SIZE	STRAIGHT THREAD	C HEX	L	M	FLOW DIA. D
62CA-2	1/8	5/16-24	5/16	1.12	.64	.094
62CA-3	3/16	3/8-24	3/8	1.19	.72	.125
62CA-4	1/4	7/16-24	7/16	1.26	.79	.188
62CA-5	5/16	1/2-24	1/2	1.32	.85	.250
62CA-6	3/8	9/16-24	9/16	1.42	.97	.312
62CA-8	1/2	11/16-20	11/16	1.53	1.08	.406
62CA-10	5/8	13/16-18	13/16	1.71	1.23	.500
62CA-12	3/4	1-18	1	2.20	1.41	.562
62CA-14	7/8	1-1/8-18	1-1/8	2.08	1.19	.766

Union Reducers 62CA



PART NO.	1 TUBE SIZE	2 TUBE SIZE	1 STRAIGHT THREAD	2 STRAIGHT THREAD	C HEX	L	M	FLOW DIA. D
62CA-4-3	3/16	1/4	3/8-24	7/16-24	7/16	1.25	.78	.125
62CA-6-4	1/4	3/8	7/16-24	9/16-24	9/16	1.37	.91	.188
62CA-8-6	3/8	1/2	9/16-24	11/16-20	11/16	1.48	1.03	.312
62CA-10-6	3/8	5/8	9/16-24	13/16-18	13/16	1.59	1.13	.312


Bulkhead Union 62CABH



PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	L	M	BULKHEAD HOLE DIA.	FLOW DIA. D
62CABH-4	1/4	7/16-24	9/16	2.22	1.75	7/16	.188
62CABH-6	3/8	9/16-24	11/16	2.32	1.88	9/16	.312

Union 62PCA


(Poly-Tite to Compress-Align)



PART NO.	TUBE SIZE	1 STRAIGHT THREAD	2 STRAIGHT THREAD	C HEX	L	M	FLOW DIA. D
62PCA-4	1/4	3/8-24	7/16-24	7/16	1.24	.89	.125
62PCA-5	5/16	7/16-24	1/2-24	1/2	1.26	.92	.144
62PCA-6	3/8	1/2-24	9/16-24	9/16	1.32	.98	.204

Bulkhead Union 62PCABH


(Poly-Tite to Compress-Align)



PART NO.	TUBE SIZE	1 STR THD	2 STR THD	C HEX	P MAX	L	M	FLOW BKH DIA.	FLOW DIA. D
62PCABH-4	1/4	3/8-24	7/16-24	9/16	.38	1.80	1.45	3/8	.125
62PCABH-6	3/8	1/2-24	9/16-24	11/16	.47	1.98	1.64	1/2	.204


Brass Insert 63PT

(For industrial grade plastic tubing)




PART NO.	TUBE SIZE	TUBE WALL	L	O.D.
63PT-2-16	1/8	.016	.46	.080
63PT-2-23	1/8	.023	.45	.073
63PT-2-32	1/8	.032	.31	.061
63PT-3-25	3/16	.025	.45	.135
63PT-3-40	3/16	.040	.52	.095
63PT-4-40	1/4	.040	.50	.163
63PT-4-62	1/4	.062	.33	.110
63PT-5-40	5/16	.040	.50	.232
63PT-5-62	5/16	.062	.53	.187
63PT-6-62	3/8	.062	.56	.250
63PT-8-62	1/2	.062	.72	.370
63PT-10-62	5/8	.062	.72	.483

A



Female Connector 66CA


PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	C HEX	L	M	FLOW DIA. D
66CA-2-2	1/8	1/8	5/16-24	9/16	.99	.75	.094
66CA-3-2	3/16	1/8	3/8-24	9/16	1.01	.78	.125
66CA-3-4	3/16	1/4	3/8-24	11/16	1.19	.96	.125
66CA-4-2	1/4	1/8	7/16-24	9/16	1.02	.78	.188
66CA-4-4	1/4	1/4	7/16-24	11/16	1.24	1.00	.188
66CA-5-2	5/16	1/8	1/2-24	9/16	1.05	.81	.250
66CA-5-4	5/16	1/4	1/2-24	11/16	1.27	1.03	.250
66CA-6-2	3/8	1/8	9/16-24	9/16	1.00	.78	.312
66CA-6-4	3/8	1/4	9/16-24	11/16	1.28	1.06	.312
66CA-6-6	3/8	3/8	9/16-24	13/16	1.29	1.06	.312
66CA-6-8	3/8	1/2	9/16-24	1	1.49	1.27	.312
66CA-8-4	1/2	1/4	11/16-20	11/16	1.32	1.09	.406
66CA-8-6	1/2	3/8	11/16-20	13/16	1.35	1.12	.406
66CA-8-8	1/2	1/2	11/16-20	1	1.54	1.31	.406
66CA-10-8	5/8	1/2	13/16-18	1	1.62	1.38	.500




Male Connector 68CA

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	C HEX	L	M	FLOW DIA. D
68CA-2-1	1/8	1/16	5/16-24	11/32	1.02	.78	.095
68CA-2-2	1/8	1/8	5/16-24	7/16	1.01	.77	.094
68CA-3-1	3/16	1/16	3/8-24	3/8	1.07	.84	.125
68CA-3-2	3/16	1/8	3/8-24	7/16	1.07	.84	.125
68CA-3-4	3/16	1/4	3/8-24	9/16	1.26	1.03	.125
68CA-4-2	1/4	1/8	7/16-24	7/16	1.10	.86	.188
68CA-4-4	1/4	1/4	7/16-24	9/16	1.31	1.06	.188
68CA-4-6	1/4	3/8	7/16-24	11/16	1.28	1.03	.188
68CA-4-8	1/4	1/2	7/16-24	7/8	1.56	1.31	.188
68CA-5-2	5/16	1/8	1/2-24	1/2	1.13	.89	.234
68CA-5-4	5/16	1/4	1/2-24	9/16	1.35	1.07	.250
68CA-6-2	3/8	1/8	9/16-24	9/16	1.19	.97	.250
68CA-6-4	3/8	1/4	9/16-24	9/16	1.36	1.14	.312
68CA-6-6	3/8	3/8	9/16-24	11/16	1.43	1.16	.312
68CA-6-8	3/8	1/2	9/16-24	7/8	1.52	1.25	.312
68CA-8-4	1/2	1/4	11/16-20	11/16	1.45	1.22	.312
68CA-8-6	1/2	3/8	11/16-20	11/16	1.43	1.20	.406
68CA-8-8	1/2	1/2	11/16-20	7/8	1.54	1.31	.406
68CA-10-6	5/8	3/8	13/16-18	13/16	1.55	1.31	.406
68CA-10-8	5/8	1/2	13/16-18	7/8	1.72	1.48	.500
68CA-10-12	5/8	3/4	13/16-18	1-1/16	1.80	1.56	.500
68CA-12-8	3/4	1/2	1-18	1	1.99	1.60	.562
68CA-12-12	3/4	3/4	1-18	1-1/16	2.02	1.63	.656
68CA-14-12	7/8	3/4	1-1/8-18	1-1/8	1.85	1.41	.750
68CA-16-12	1	3/4	1-1/4-18	1-1/4	1.83	1.39	.750
68CA-16-16	1	1	1-1/4-18	1-3/8	2.02	1.58	.875

Union Tee 164CA-264CA




PART NO.	TUBE SIZE	STRAIGHT THREAD	L	M	FLOW DIA. D
164CA-2	1/8	5/16-24	.84	.61	.093
264CA-3	3/16	3/8-24	.83	.60	.125
164CA-4	1/4	7/16-24	.84	.63	.188
264CA-4	1/4	7/16-24	.84	.60	.188
164CA-5	5/16	1/2-24	.95	.71	.250
164CA-6	3/8	9/16-24	.96	.74	.312
164CA-8	1/2	11/16-20	1.15	.93	.406
164CA-10	5/8	13/16-18	1.32	1.08	.500
164CA-12	3/4	1.00-18	1.56	1.17	.562



Union Tee 164CA combination sizes


PART NO.	1 TUBE SIZE	2 TUBE SIZE	3 TUBE SIZE	L1	L2	L3	M1	M2	M3	FLOW DIA. D
164CA-6-4-4	3/8	1/4	1/4	.97	.96	.96	.75	.72	.72	.188
164CA-6-6-4	3/8	3/8	1/4	.97	.97	.96	.75	.75	.72	.188
164CA-8-8-6	1/2	1/2	3/8	1.17	1.17	1.10	.94	.94	.88	.312



Union Elbow 165CA-265CA


PART NO.	TUBE SIZE	STRAIGHT THREAD	L	M	FLOW DIA. D
165CA-2	1/8	5/16-24	.84	.61	.094
165CA-3	3/16	3/8-24	.84	.61	.125
165CA-4	1/4	7/16-24	.84	.61	.188
265CA-4	1/4	7/16-24	.84	.60	.188
165CA-5	5/16	1/2-24	.94	.71	.250
165CA-6	3/8	9/16-24	.96	.74	.312
165CA-8	1/2	11/16-20	1.15	.93	.406
165CA-10	5/8	13/16-18	1.29	1.05	.500
165CA-12	3/4	1-18	1.56	1.17	.562
165CA-16	1	1-1/4-18	1.63	1.19	.877

Gage Tee 168CA



PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	N1	FLOW DIA. D
168CA-4-2	1/4	1/8	7/16-24	.96	.72	1.41	.56	.188

Male Elbow 169CA-269CA




PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
169CA-2-1	1/8	1/16	5/16-24	.84	.60	.67	.095
269CA-2-2	1/8	1/8	5/16-24	.84	.60	.67	.094
169CA-3-1	3/16	1/16	3/8-24	.84	.61	.67	.126
169CA-3-2	3/16	1/8	3/8-24	.84	.61	.69	.125
269CA-3-2	3/16	1/8	3/8-24	.83	.60	.67	.125
169CA-3-4	3/16	1/4	3/8-24	.87	.64	.93	.125
169CA-4-2	1/4	1/8	7/16-24	.84	.61	.74	.188
269CA-4-2	1/4	1/8	7/16-24	.84	.60	.73	.188
169CA-4-4	1/4	1/4	7/16-24	.86	.62	.94	.188
269CA-4-4	1/4	1/4	7/16-24	.84	.60	.79	.188
169CA-4-6	1/4	3/8	7/16-24	.92	.68	1.00	.188
169CA-5-2	5/16	1/8	1/2-24	.84	.61	.74	.234
269CA-5-2	5/16	1/8	1/2-24	.84	.60	.73	.250
169CA-5-4	5/16	1/4	1/2-24	.94	.71	.93	.250
269CA-5-4	5/16	1/4	1/2-24	.91	.67	.82	.250
169CA-5-6	5/16	3/8	1/2-24	.99	.75	1.00	.250
169CA-6-2	3/8	1/8	9/16-24	.96	.74	.74	.234
269CA-6-2	3/8	1/8	9/16-24	.96	.69	.75	.220
169CA-6-4	3/8	1/4	9/16-24	.96	.74	.93	.312
269CA-6-4	3/8	1/4	9/16-24	.95	.73	.92	.312
169CA-6-6	3/8	3/8	9/16-24	.97	.75	1.00	.312
269CA-6-6	3/8	3/8	9/16-24	1.06	.84	.97	.312
169CA-6-8	3/8	1/2	9/16-24	1.16	.94	1.27	.312
169CA-8-4	1/2	1/4	11/16-20	1.17	.94	1.00	.312
169CA-8-6	1/2	3/8	11/16-20	1.15	.93	1.11	.406
169CA-8-8	1/2	1/2	11/16-20	1.23	1.00	1.37	.406
169CA-10-6	5/8	3/8	13/16-18	1.30	1.06	1.15	.406
169CA-10-8	5/8	1/2	13/16-18	1.30	1.06	1.31	.500
169CA-12-8	3/4	1/2	1-18	1.57	1.18	1.49	.562
169CA-12-12	3/4	3/4	1-18	1.66	1.27	1.58	.562
169CA-16-12	1	3/4	1-1/4-18	1.63	1.19	1.60	.875

Female Elbow 170CA-270CA




PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
170CA-2-2	1/8	1/8	5/16-24	.93	.69	.56	.094
170CA-3-2	3/16	1/8	3/8-24	.98	.69	.56	.125
170CA-4-2	1/4	1/8	7/16-24	.98	.69	.56	.188
270CA-4-2	1/4	1/8	7/16-24	.91	.67	.54	.188
170CA-4-4	1/4	1/4	7/16-24	1.02	.78	.67	.188
170CA-6-4	3/8	1/4	9/16-24	1.09	.79	.73	.312
170CA-6-6	3/8	3/8	9/16-24	1.16	.89	.69	.312
170CA-8-6	1/2	3/8	11/16-20	1.23	1.00	.69	.406
170CA-8-8	1/2	1/2	11/16-20	1.38	1.15	.97	.408
170CA-12-12	3/4	3/4	1-18	1.97	1.58	1.58	.560

Male Run Tee 171CA




PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
171CA-2-2	1/8	1/8	5/16-24	.84	.61	.67	.094
171CA-3-2	3/16	1/8	3/8-24	.83	.61	.67	.125
171CA-4-2	1/4	1/8	7/16-24	.88	.64	.75	.188
171CA-4-4	1/4	1/4	7/16-24	.93	.69	.92	.188
171CA-6-4	3/8	1/4	9/16-24	1.03	.81	1.03	.312

Male Branch Tee 172CA




PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
172CA-2-2	1/8	1/8	5/16-24	.84	.61	.67	.093
172CA-3-2	3/16	1/8	3/8-24	.83	.61	.67	.125
172CA-4-2	1/4	1/8	7/16-24	.84	.61	.74	.188
172CA-4-4	1/4	1/4	7/16-24	.93	.69	.92	.188
172CA-6-2	3/8	1/8	9/16-24	.97	.75	.75	.234
172CA-6-4	3/8	1/4	9/16-24	.99	.77	.92	.312
172CA-6-6	3/8	3/8	9/16-24	1.03	.81	1.00	.312
172CA-8-6	1/2	3/8	11/16-20	1.15	.93	1.10	.406
172CA-12-12	3/4	3/4	1-18	1.67	1.27	1.50	.562


A

**Adapter Tee 176CA**


PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	N1	FLOW DIA. D
176CA-4-2	1/4	1/8	7/16-24	.92	.69	.75	.66	.188

**Female Branch Tee 177CA**


PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
177CA-4-2	1/4	1/8	7/16-24	.86	.63	.53	.188

**45° Elbow 179CA**

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
179CA-4-2	1/4	1/8	7/16-24	.89	.66	.56	.188
179CA-4-4	1/4	1/4	7/16-24	.80	.56	.84	.188
179CA-6-2	3/8	1/8	9/16-24	.85	.63	.65	.234
179CA-6-4	3/8	1/4	9/16-24	.85	.63	.84	.312
179CA-6-6	3/8	3/8	9/16-24	.97	.75	.95	.312
179CA-8-6	1/2	3/8	11/16-20	1.03	.81	.95	.406

**Seal Plug 639CA**

PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	L	M
639CA-4	1/4	7/16-24	7/16	.74	.50

**Straight Through Tank Fitting 682CA**

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	C HEX	L	M	FLOW DIA. D
682CA-3-2	3/16	1/8	3/8-24	7/16	1.07	.84	.194



Metru-Lok™

A

MATERIALS OF CONSTRUCTION	
FITTING:	BRASS
NUT:	BRASS
FERRULE:	BRASS

SPECIFICATIONS	
TEMPERATURE RANGE:	FROM -65° TO +250°F
TUBE MATERIAL:	COPPER, ALUMINUM, THERMOPLASTIC TUBING
TUBE O.D.(MM):	4,6,8,10,12,14,16,18,20,22
OPERATING FLUID:	WATER, AIR, INERT AND NON-COMBUSTIBLE GASSES COMPATIBLE WITH MATERIALS OF CONSTRUCTION
NOTE:	FOR OTHER TYPES OF FLUIDS OR GASSES, PLEASE CONSULT FACTORY


Assembly Instructions

1. Cut the tube square.
2. De-burr (copper tube).
3. Insert the tube through the nut and ferrule until it bottoms.
4. Finger tighten the nut.
5. Wrench tighten the nut one turn, or one and one half turns, according to size.




A one piece, ready to use, bite type fitting. Preassembled fitting with captive ferrule. No presetting of the ferrule is necessary. Visible ferrule allows for visual inspection before and after assembly.

Technical Features



MATERIAL			WORKING TEMP.	WORKING PRESSURE* DEPENDING ON TUBE O.D.								
1	2	3		TUBE O.D. MM PSI	4	6	8	10	12	14	16 TO 20	800
BODY BRASS	NUT BRASS	FERRULE BRASS	FROM -65° TO +250° F		2600	2600	1800	1500	1300	1000		


Fitting Dimensions




1 TUBE O.D. MM	2 METRIC STRAIGHT THREAD	3 INSIDE DIAMETER MM	4 HEX OF NUT MM	5 TUBE ENTRY BODY MM	6 TUBE ENTRY COMPL. FITTING MM	WRENCH TIGHTENING IN TURNS
4	M8X1	2	10	4	12	1 1/2
6	M10X1	4	12	5	13	1 1/2
8	M12X1	6	14	6	14	1 1/2
10	M14X1	8	17	6	14	1 1/2
12	M16X1	10	19	7	15	1 1/2
14	M18X1	12	22	8	16	1 1/2
16	M22X1.50	14	27	8	16	1
18	M24X1.50	16	30	9	21	1
20	M26X1.50	18	32	9	21	1
22	M28X1.50	20	36	10	22	1

A

FBMB Male Connector NPT




PART NO.	TUBE SIZE	NPT THREAD	C HEX	C1	L
FBMB4-1/16	4	1/16	8	10	26
FBMB4-1/8	4	1/8	11	10	27
FBMB6-1/8	6	1/8	11	12	28
FBMB6-1/4	6	1/4	14	12	32
FBMB8-1/8	8	1/8	12	14	29
FBMB8-1/4	8	1/4	14	14	33
FBMB10-1/4	10	1/4	14	17	33
FBMB10-3/8	10	3/8	19	17	34
FBMB12-3/8	12	3/8	19	19	35
FBMB12-1/2	12	1/2	22	19	40
FBMB14-3/8	14	3/8	19	22	36
FBMB14-1/2	14	1/2	22	22	41
FBMB16-1/2	16	1/2	22	27	40
FBMB18-1/2	18	1/2	24	30	46
FBMB20-3/4	20	3/4	27	32	47
FBMB22-3/4	22	3/4	30	36	49



F3BMB Male Connector BSPT


PART NO.	TUBE SIZE	BSPT THREAD	C HEX	C1	L
F3BMB4-1/8	4	1/8	10	10	24.0
F3BMB6-1/8	6	1/8	11	12	26.0
F3BMB6-1/4	6	1/4	14	12	29.5
F3BMB8-1/8	8	1/8	12	14	27.5
F3BMB8-1/4	8	1/4	14	14	30.5
F3BMB10-1/4	10	1/4	14	17	30.5
F3BMB10-3/8	10	3/8	17	17	31.0
F3BMB12-3/8	12	3/8	17	19	32.4
F3BMB12-1/2	12	1/2	22	19	35.5
F3BMB14-3/8	14	3/8	19	22	33.2
F3BMB14-1/2	14	1/2	22	22	36.2
F3BMB16-3/8	16	3/8	22	27	34.2
F3BMB16-1/2	16	1/2	22	27	36.4
F3BMB18-1/2	18	1/2	24	30	42.3
F3BMB20-3/4	20	3/4	27	32	43.0
F3BMB22-3/4	22	3/4	30	36	45.0

F4BMB Male Connector BSPP



PART NO.	TUBE SIZE	BSPP THREAD	C HEX	C1	L
F4BMB4-1/8	4	1/8	14	10	29
F4BMB6-1/8	6	1/8	14	12	30
F4BMB6-1/4	6	1/4	19	12	32
F4BMB8-1/4	8	1/4	19	14	33
F4BMB10-1/4	10	1/4	19	17	33


These parts are supplied with a copper seal.



F8BMB Male Connector Metric Straight Thread


PART NO.	TUBE SIZE	MM THREAD	C HEX	C1	L
F8BMB4M5	4	M5X0.8	8	10	24
F8BMB12M16	12	M16X1.5	22	19	37
F8BMB12M22	12	M22X1.5	27	19	40
F8BMB14M16	14	M16X1.5	22	22	38
F8BMB14M22	14	M22X1.5	27	22	41
F8BMB16M16	16	M16X1.5	22	27	37
F8BMB16M22	16	M22X1.5	27	27	40

These parts are supplied with a copper seal.




HBMB Equal Union


PART NO.	TUBE SIZE	C HEX	C1	L
HBMB4	4	8	10	31
HBMB6	6	10	12	34
HBMB8	8	12	14	37
HBMB10	10	14	17	37
HBMB12	12	17	19	39
HBMB14	14	19	22	41
HBMB16	16	22	27	41
HBMB18	18	24	30	51
HBMB20	20	27	32	51
HBMB22	22	30	36	54

**GBMB Female Connector NPT**


PART NO.	TUBE SIZE	NPT THREAD	C HEX	C1	L
GBMB6-1/8	6	1/8	14	12	29
GBMB6-1/4	6	1/4	19	12	32
GBMB8-1/8	8	1/8	14	14	30
GBMB8-1/4	8	1/4	19	14	33
GBMB10-1/4	10	1/4	19	17	33
GBMB10-3/8	10	3/8	22	17	35
GBMB12-3/8	12	3/8	22	19	36
GBMB12-1/2	12	1/2	27	19	38
GBMB14-3/8	14	3/8	22	22	37
GBMB14-1/2	14	1/2	27	27	39
GBMB16-1/2	16	1/2	27	27	39

**G4BMB Female Connector BSPP**


PART NO.	TUBE SIZE	BSPP THREAD	C HEX	C1	L
G4BMB4-1/8	4	1/8	14	10	26
G4BMB6-1/8	6	1/8	14	12	27
G4BMB6-1/4	6	1/4	19	12	29
G4BMB8-1/8	8	1/8	14	14	28
G4BMB8-1/4	8	1/4	19	14	30
G4BMB10-1/4	10	1/4	19	17	30
G4BMB10-3/8	10	3/8	22	17	32
G4BMB12-3/8	12	3/8	22	19	33
G4BMB12-1/2	12	1/2	27	19	36
G4BMB14-3/8	14	3/8	22	22	34
G4BMB14-1/2	14	1/2	27	22	37
G4BMB16-1/2	14	1/2	27	27	37
G4BMB18-1/2	18	1/2	27	30	41

**WBMB Bulkhead Union**

PART NO.	TUBE SIZE	MM THREAD	C HEX	C1	L	L1	L2	BULKHEAD HOLE DIA.
WBMB4	4	M8X1	12	10	47	19	28	8MM
WBMB6	6	M10X1	14	12	49	20	29	10MM
WBMB8	8	M12X1	16	14	52	21	31	12MM
WBMB10	10	M14X1	19	17	53	22	31	14MM
WBMB12	12	M16X1	22	19	56	24	32	16MM
WBMB14	14	M18X1	24	22	60	26	34	18MM
WBMB16	16	M22X1.5	27	27	58	25	33	22MM
WBMB18	18	M24X1.5	30	30	70	31	39	24MM
WBMB20	20	M26X1.5	32	32	70	31	39	26MM
WBMB22	22	M28X1.5	36	36	74	33	41	28MM


**WBMPB Mixed Bulkhead Union**

PART NO.	TUBE SIZE 1	TUBE SIZE 2	MM THREAD	C1	C HEX	L	W	BULKHEAD HOLE DIA.
WBMPB4	4	4	M8X1	10	12	34	5	8MM
WBMPB6	6	6	M10X1	12	12	37	5	10MM
WBMPB8	8	8	M12X1	14	16	39	5	12MM
WBMPB10	10	10	M14X1	17	19	45	5	14MM
WBMPB12	12	12	M16X1	19	22	49	5	16MM
WBMPB14	14	14	M18X1	22	22	52	7	18MM


**CBMB 90° Male Elbow NPT**

PART NO.	TUBE SIZE	NPT THREAD	C1	M	N
CBMB4-1/8	4	1/8	10	22	17
CBMB6-1/8	6	1/8	12	24	18
CBMB6-1/4	6	1/4	12	24	22
CBMB8-1/8	8	1/8	14	26	19
CBMB8-1/4	8	1/4	14	26	23
CBMB10-1/4	10	1/4	17	27	24
CBMB10-3/8	10	3/8	17	28	25
CBMB12-3/8	12	3/8	19	32	27
CBMB12-1/2	12	1/2	19	32	31
CBMB14-3/8	14	3/8	22	32	26
CBMB14-1/2	14	1/2	22	33	31
CBMB16-1/2	16	1/2	27	35	34
CBMB18-1/2	18	1/2	30	41	35
CBMB20-3/4	20	3/4	32	45	40
CBMB22-3/4	22	3/4	36	46	40


A

**C3BMB 90° Male Elbow BSPT**


PART NO.	TUBE SIZE	BSPT THREAD	C1	M	N
C3BMB4-1/8	4	1/8	10	22	17.0
C3BMB6-1/8	6	1/8	12	24	17.0
C3BMB6-1/4	6	1/4	12	24	20.5
C3BMB8-1/8	8	1/8	14	26	18.0
C3BMB8-1/4	8	1/4	14	26	21.5
C3BMB10-1/4	10	1/4	17	27	22.5
C3BMB10-3/8	10	3/8	17	28	22.1
C3BMB12-3/8	12	3/8	19	32	25.1
C3BMB12-1/2	12	1/2	19	32	27.8
C3BMB14-3/8	14	3/8	22	32	24.1
C3BMB14-1/2	14	1/2	22	32	27.3
C3BMB16-1/2	16	1/2	27	35	30.8
C3BMB18-1/2	18	1/2	30	41	31.8
C3BMB22-3/4	22	3/4	36	46	36.5

**C8BMB 90° Adjustable Male Elbow Metric Straight Thread**


PART NO.	TUBE SIZE	MM THREAD	C1	C4	M	N
C8BMB12M22	12	M22X1.5	19	30	35	39
C8BMB14M16	14	M16X1.5	22	22	32	33
C8BMB14M22	14	M22X1.5	22	30	35	39
C8BMB16M16	16	M16X1.5	24	22	35	36
C8BMB16M22	16	M22X1.5	27	30	36	39

**EBMB 90° Union Elbow**


PART NO.	TUBE SIZE	C1	L	Y
EBMB4	4	10	22	7
EBMB6	6	12	24	8
EBMB8	8	14	26	10
EBMB10	10	17	27	12
EBMB12	12	19	32	14
EBMB14	14	22	32	16
EBMB16	16	27	35	18
EBMB18	18	30	41	20
EBMB20	20	32	45	24

**JBMB Union Tee**


PART NO.	TUBE SIZE	C1	L	M
JBMB4	4	10	47	23.5
JBMB6	6	12	48	24.0
JBMB8	8	14	52	26.0
JBMB10	10	17	54	27.0
JBMB12	12	19	63	31.5
JBMB14	14	22	63	31.5
JBMB16	16	27	69	34.5
JBMB18	18	30	82	41.0
JBMB20	20	32	89	44.5
JBMB22	22	36	91	45.5

**RBMB Male Run Tee NPT**


PART NO.	TUBE SIZE	NPT THREAD	C1	L	M	N
RBMB6-1/4	6	1/4	12	48	25	23
RBMB8-1/8	8	1/8	14	45	26	19
RBMB8-1/4	8	1/4	14	49	26	23
RBMB10-1/4	10	1/4	17	51	27	24
RBMB10-3/8	10	3/8	17	52	28	24
RBMB12-3/8	12	3/8	19	59	32	27
RBMB12-1/2	12	1/2	19	63	32	31
RBMB14-3/8	14	3/8	22	60	33	28
RBMB14-1/2	14	1/2	22	64	33	31
RBMB16-1/2	16	1/2	22	69	35	34

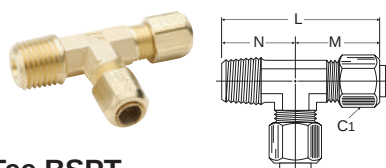**R3BMB Male Run Tee BSPT**


PART NO.	TUBE SIZE	BSPT THREAD	C1	L	M	N
R3BMB6-1/8	6	1/8	12	42	24	18
R3BMB6-1/4	6	1/4	12	48	25	23
R3BMB8-1/8	8	1/8	14	45	26	19
R3BMB8-1/4	8	1/4	14	49	26	23
R3BMB10-1/4	10	1/4	17	51	27	24
R3BMB10-3/8	10	3/8	17	52	28	24
R3BMB12-3/8	12	3/8	19	59	32	27
R3BMB12-1/2	12	1/2	19	63	32	31
R3BMB14-3/8	14	3/8	22	59	32	28
R3BMB14-1/2	14	1/2	22	63	33	31
R3BMB16-1/2	16	1/2	27	69	35	34

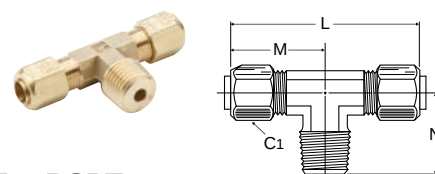**S3BMB Male Branch Tee BSPT**


PART NO.	TUBE SIZE	BSPT THREAD	C1	L	M	N
S3BMB6-1/8	6	1/8	12	48	24.0	18
S3BMB6-1/4	6	1/4	12	49	24.5	23
S3BMB8-1/8	8	1/8	14	52	26.0	19
S3BMB8-1/4	8	1/4	14	52	26.0	23
S3BMB10-1/4	10	1/4	17	54	27.0	24
S3BMB10-3/8	10	3/8	17	56	28.0	24
S3BMB12-3/8	12	3/8	19	63	31.5	27
S3BMB12-1/2	12	1/2	19	63	31.5	31
S3BMB14-3/8	14	3/8	22	63	31.5	28
S3BMB14-1/2	14	1/2	22	65	32.5	31
S3BMB16-1/2	16	1/2	27	69	34.5	34

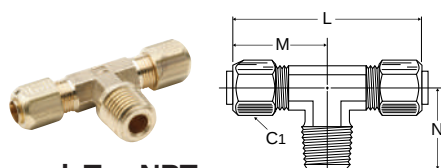**SBMB Male Branch Tee NPT**


PART NO.	TUBE SIZE	NPT THREAD	C1	L	M	N
SBMB6-1/8	6	1/8	12	48	24.0	18
SBMB6-1/4	6	1/4	12	50	25.0	23
SBMB8-1/8	8	1/8	14	52	26.0	19
SBMB8-1/4	8	1/4	14	52	26.0	23
SBMB10-1/4	10	1/4	17	56	28.0	24
SBMB10-3/8	10	3/8	17	56	28.0	24
SBMB12-3/8	12	3/8	19	63	31.5	25
SBMB12-1/2	12	1/2	19	63	31.5	31

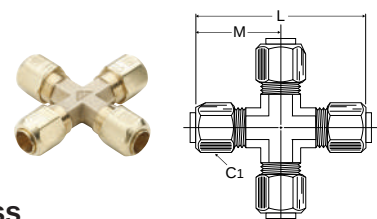**KBMB Union Cross**


PART NO.	TUBE SIZE	C1	L	M
KBMB6	6	12	48	24.0
KBMB8	8	14	52	26.0
KBMB10	10	17	54	27.0
KBMB12	12	19	63	31.5
KBMB14	14	22	65	32.5

**COR4BMB Single Banjo BSPP**


PART NO.	TUBE SIZE	BSPP THREAD	C1	C5	M	N	N1
COR4BMB4-1/8	4	1/8	10	14	23	15	27
COR4BMB6-1/4	6	1/4	12	19	26	18	29
COR4BMB8-1/4	8	1/4	14	19	27	20	35
COR4BMB14-1/2	14	1/2	22	27	34	27	48
COR4BMB16-1/2	16	1/2	27	27	33	27	48
COR4BMB20-3/4	20	3/4	32	32	41	33	60

A**T2HFB Tube End
Male Adapter NPT**


PART NO.	TUBE SIZE	NPT THREAD	C HEX	L
T2HFB6-1/8	6	1/8	11	31
T2HFB6-1/4	6	1/4	14	36
T2HFB8-1/8	8	1/8	11	32
T2HFB8-1/4	8	1/4	14	36
T2HFB10-1/4	10	1/4	14	37
T2HFB10-3/8	10	3/8	19	38
T2HFB12-3/8	12	3/8	19	38
T2HFB12-1/2	12	1/2	22	43
T2HFB14-3/8	14	3/8	19	39
T2HFB14-1/2	14	1/2	22	44
T2HFB16-1/2	16	1/2	22	46
T2HFB18-1/2	18	1/2	22	50
T2HFB20-3/4	20	3/4	27	51
T2HFB22-3/4	22	3/4	27	54

**T23HFB Tube End
Male Adapter BSPT**

PART NO.	TUBE SIZE	BSPT THREAD	C HEX	L
T23HFB6-1/8	6	1/8	10	30
T23HFB6-1/4	6	1/4	14	34
T23HFB8-1/8	8	1/8	10	30
T23HFB8-1/4	8	1/4	14	35
T23HFB10-1/4	10	1/4	14	36
T23HFB10-3/8	10	3/8	17	36
T23HFB12-3/8	12	3/8	17	37
T23HFB12-1/2	12	1/2	22	40
T23HFB14-3/8	14	3/8	17	38
T23HFB14-1/2	14	1/2	22	41
T23HFB16-1/2	16	1/2	22	43
T23HFB18-1/2	18	1/2	22	47
T23HFB20-3/4	20	3/4	27	49
T23HFB22-3/4	22	3/4	27	51


**T28HFB Tube Adapter
Metric Straight Thread**

PART NO.	TUBE SIZE	MM THREAD	C HEX	L
T28HFB12M14	12	M14X1.5	19	39
T28HFB12M16	12	M16X1.5	22	40
T28HFB12M18	12	M18X1.5	24	40
T28HFB12M22	12	M22X1.5	27	43
T28HFB14M16	14	M16X1.5	22	41

**T2HGB Tube End
Female Adapter NPT**


PART NO.	TUBE SIZE	NPT THREAD	C HEX	L
T2HGB6-1/8	6	1/8	14	32
T2HGB6-1/4	6	1/4	19	35
T2HGB8-1/8	8	1/8	14	33
T2HGB8-1/4	8	1/4	19	36
T2HGB10-1/4	10	1/4	19	37
T2HGB12-3/8	12	3/8	22	39
T2HGB12-1/2	12	1/2	27	41
T2HGB14-3/8	14	3/8	22	40
T2HGB14-1/2	14	1/2	27	42
T2HGB16-1/2	16	1/2	27	44
T2HGB18-1/2	18	1/2	27	48
T2HGB20-3/4	20	3/4	32	49
T2HGB22-3/4	22	3/4	32	51

T24HGB Tube End Female Adapter BSPP




PART NO.	TUBE SIZE	BSPP THREAD	C HEX	L
T24HGB6-1/8	6	1/8	14	30
T24HGB6-1/4	6	1/4	19	32
T24HGB8-1/8	8	1/8	14	31
T24HGB8-1/4	8	1/4	19	33
T24HGB10-1/4	10	1/4	19	34
T24HGB10-3/8	10	3/8	22	36
T24HGB12-3/8	12	3/8	22	36
T24HGB12-1/2	12	1/2	27	40
T24HGB14-3/8	14	3/8	22	37
T24HGB14-1/2	14	1/2	27	41
T24HGB16-1/2	16	1/2	27	42
T24HGB18-1/2	18	1/2	27	46
T24HGB20-3/4	20	3/4	32	47
T24HGB22-3/4	22	3/4	32	49

BTMB Nut and Ferrule




PART NO.	TUBE SIZE	C1	L
BTMB4	4	10	12
BTMB6	6	12	13
BTMB8	8	14	14
BTMB10	10	17	14
BTMB12	12	19	15
BTMB14	14	22	16
BTMB16	16	27	16
BTMB18	18	30	21
BTMB20	20	32	21
BTMB22	22	36	22

BMB Nut




PART NO.	TUBE SIZE	C1	L
BMB4	4	10	11
BMB6	6	12	12
BMB8	8	14	13
BMB10	10	17	13
BMB12	12	19	14
BMB14	14	22	15
BMB16	16	27	15
BMB18	18	30	19
BMB20	20	32	19
BMB22	22	36	20

FNMB Fitting Body Cap




PART NO.	TUBE SIZE	C1	L
FNMB4	4	10	14
FNMB6	6	12	15
FNMB8	8	14	16
FNMB10	10	17	16
FNMB12	12	19	17
FNMB14	14	22	18
FNMB16	16	27	18
FNMB18	18	30	23
FNMB20	20	32	23
FNMB22	22	36	24


PNMB Tube Plug




PART NO.	TUBE SIZE	C HEX	L
PNMB4	4	8	11
PNMB6	6	10	13
PNMB8	8	12	15
PNMB10	10	14	15
PNMB12	12	17	16
PNMB14	14	19	17
PNMB16	16	22	18
PNMB18	18	24	20
PNMB20	20	27	20
PNMB22	22	30	22

A**TMB Ferrule**

PART NO.	TUBE SIZE	L
TMB4A	4	10
TMB6A	6	10
TMB8A	8	10
TMB10A	10	10
TMB12A	12	10
TMB14A	14	10
TMB16A	16	10
TMB18A	18	14
TMB20A	20	14
TMB22A	22	14

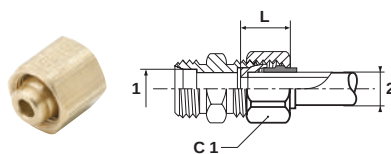**TRBMB
Tube End Reducer**

PART NO.	TUBE 1	TUBE 2	C1	L
TRBMB6-4	6	4	12	14
TRBMB8-4	8	4	14	15
TRBMB8-6	8	6	14	15
TRBMB10-6	10	6	17	16
TRBMB10-8	10	8	17	16
TRBMB12-8	12	8	19	16
TRBMB12-10	12	10	19	16
TRBMB14-10	14	10	22	18
TRBMB14-12	14	12	22	18
TRBMB16-12	16	12	27	19
TRBMB16-14	16	14	27	19
TRBMB18-14	18	14	30	21
TRBMB20-16	20	16	32	21
TRBMB22-18	22	18	36	21

**T23UB Tube Insert**

PART NO.	TUBE I.D.	TUBE O.D.	L
T23UB4	4	6	10
T23UB6	6	8	15
T23UB8	8	10	15
T23UB10	10	12	15
T23UB12	12	14	15



Poly-Tite Fittings

A

MATERIALS OF CONSTRUCTION	
BODIES & NUTS:	CA377, CA360, CA345, 316 STAINLESS STEEL
PLASTIC SLEEVES:	ACETAL COPOLYMER
O-RINGS:	BUNA N ON CHROME PLATED COUPLINGS FLUOROCARBON ON STAINLESS STEEL COUPLINGS

NOMENCLATURE	
EXAMPLE: 66P-4-2	ATTRIBUTE:
66	FEMALE CONNECTOR (TUBE TO FEMALE PIPE)
P	POLY-TITE
4	1/4" TUBE O.D.
2	1/8" PIPE THREAD

APPLICABLE TUBE	
TUBE MATERIAL:	THERMOPLASTIC TUBING, SOFT METAL TUBING
TUBE O.D.:	1/8, 3/16, 1/4, 5/16, 3/8, 1/2

PRESSURE AND TEMPERATURE RANGE	
THERMOPLASTIC TUBING	UP TO 150 PSI FROM 0° TO +150°F
SOFT METAL TUBING	UP TO 300 PSI FROM 0° TO +175°F



A preassembled compact compression fitting. An exclusive acetal copolymer sleeve has superior resilience to resist creeping and stress caused from compression. Poly-Tite nuts will rotate around the sleeve as it tightens to prevent twisting and weakening of the plastic tubing.

Assembly Instructions


Polyethylene, polypropylene and vinyl tubing:


1. Cut tubing squarely—maximum of 15° angle allowable.
2. Check that port or mating part is clean and free of debris.
3. Insert tube end until it bottoms in the Poly-Tite fitting and tighten knurl/hex nut finger-tight — plus one wrench turn.

Tube Support O.D.

TUBE SIZE INCHES	* D1 TUBE SUPPORT O.D.
1/4	.168
5/16	.185
3/8	.248
1/2	.373

* Note: No tube support for sizes 1/8" and 3/16"




A**Spring Guard 56PSG**


PART NO.	TUBE O.D.	L
56PSG-4	1/4	3.000
56PSG-5	5/16	3.000
56PSG-6	3/8	3.000

**Plastic Cap 59P**


PART NO.	TUBE SIZE	A	L
59P-4	1/4	.247	.50
59P-5	5/16	.307	.53
59P-6	3/8	.372	.56
59P-8	1/2	.497	.63

**Acetal Plastic Sleeve 60P**

PART NO.	TUBE SIZE	A	D	L
60P-4	1/4	.334	.261	.338
60P-5	5/16	.405	.321	.340
60P-6	3/8	.465	.381	.367
60P-8	1/2	.628	.514	.399


**Sleeve 60PB**

PART NO.	L	O.D.	I.D.
60PB-2	.187	.265	.130
60PB-3	.187	.322	.192
60PB-4	.187	.336	.255
60PB-5	.187	.400	.318
60PB-6	.218	.460	.382
60PB-8	.250	.620	.507


**Nut and Plastic Sleeve Assembly 61P**

PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	D	L
61P-2*	1/8	5/16-24	3/8	.130	.34
61P-3*	3/16	3/8-24	7/16	.192	.37
61P-4	1/4	3/8-24	7/16	.261	.38
61P-5	5/16	7/16-24	1/2	.321	.34
61P-6	3/8	1/2-24	9/16	.380	.38
61P-8	1/2	11/16-20	3/4	.514	.44

* Brass Sleeve

Nut and Brass Sleeve Assembly 61PB


PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	D	L
61PB-4	1/4	3/8-24	7/16	.255	.38
61PB-5	5/16	7/16-24	1/2	.318	.34
61PB-6	3/8	1/2-24	9/16	.382	.38
61PB-8	1/2	11/16-20	3/4	.507	.44

Nut 61PN

PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	L
61PN-2	1/8	5/16-24	3/8	.34
61PN-3	3/16	3/8-24	7/16	.37
61PN-4	1/4	3/8-24	7/16	.38
61PN-5	5/16	7/16-24	1/2	.34
61PN-6	3/8	1/2-24	9/16	.38
61PN-8	1/2	11/16-20	3/4	.44

Nut only for use with Spring Guard 61PSGN


PART NO.	TUBE O.D.	L	C HEX
61PSGN-4	1/4	.625	.437
61PSGN-5	5/16	.625	.500
61PSGN-6	3/8	.656	.562

**Union 62P**

PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	L	M	FLOW DIA. D
62P-2*	1/8	5/16-24	5/16	1.08	.64	.094
62P-3*	3/16	3/8-24	3/8	1.16	.73	.125
62P-4	1/4	3/8-24	3/8	1.17	.96	.125
62P-5	5/16	7/16-24	7/16	1.16	.96	.144
62P-6	3/8	1/2-24	1/2	1.23	.99	.204
62P-8	1/2	11/16-20	11/16	1.47	1.24	.323

* Brass Sleeve, No Tube Support


Union Reducer 62P



PART NO.	1 TUBE SIZE	2 TUBE SIZE	1 STRAIGHT THREAD	2 STRAIGHT THREAD	C HEX	L	M	FLOW DIA. D
62P-6-4	1/4	3/8	3/8-24	1/2-24	1/2	1.22	.99	.125


Bulkhead Union 62PTBH

(Straight Through)




PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	P MAX.	L	M	BULKHEAD HOLE DIA.	FLOW DIA. D
62PTBH-4	1/4	3/8-24	9/16	.31	1.19	.93	3/8	.260
62PTBH-5	5/16	7/16-24	5/8	.31	1.19	.93	7/16	.323
62PTBH-6	3/8	1/2-24	11/16	.34	1.26	.99	1/2	.387

Bulkhead Union 62PBH



PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	P MAX.	L	M	BULKHEAD HOLE DIA.	FLOW DIA. D
62PBH-4	1/4	3/8-24	9/16	.38	1.75	1.53	3/8	.125
62PBH-5	5/16	7/16-24	5/8	.38	1.71	1.52	7/16	.144
62PBH-6	3/8	1/2-24	11/16	.47	1.89	1.65	1/2	.204
62PBH-8	1/2	1 1/16-20	7/8	.63	2.28	2.05	1 1/16	.323


Brass Insert 63PT



PART	TUBE SIZE	L	O.D.
63PT-2-16	1/8	.46	.080
63PT-2-32	1/8	.31	.061
63PT-3-25	3/16	.45	.135
63PT-3-40	3/16	.52	.095


Union 62PCA

(Tube to Compress-Align)



PART NO.	TUBE SIZE	1 STRAIGHT THREAD	2 STRAIGHT THREAD	C HEX	L	M	FLOW DIA. D
62PCA-4	1/4	3/8-24	7/16-24	7/16	1.25	.89	.125
62PCA-5	5/16	7/16-24	1/2-24	1/2	1.30	.92	.144
62PCA-6	3/8	1/2-24	9/16-24	9/16	1.37	.98	.204

Female Connector 66P




PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	C HEX	L	M	FLOW DIA. D
66P-2-2*	1/8	1/8	5/16-24	9/16	.97	.75	.094
66P-3-2*	3/16	1/8	3/8-24	9/16	1.00	.78	.125
66P-3-4*	3/16	1/4	3/8-24	11/16	1.18	.96	.125
66P-4-2	1/4	1/8	3/8-24	9/16	.97	.86	.125
66P-4-4	1/4	1/4	3/8-24	5/8	1.18	1.07	.125
66P-5-2	5/16	1/8	7/16-24	9/16	.97	.86	.144
66P-6-4	3/8	1/4	1/2-24	5/8	1.18	1.07	.204
66P-8-6	1/2	3/8	1 1/16-20	13/16	1.31	1.20	.323

*Brass Sleeve, No Tube Support


Bulkhead Union 62PCABH

(Tube to Compress-Align)



PART NO.	TUBE SIZE	1 STR THD	2 STR THD	C HEX	P MAX	L	M	BLKHD HOLE DIA.	FLOW DIA. D
62PCABH-4	1/4	3/8-24	7/16-24	9/16	.38	1.81	1.45	3/8	.125
62PCABH-6	3/8	1/2-24	9/16-24	11/16	.47	2.03	1.64	1/2	.204


A



Male Connector 68P


PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	C HEX	L	M	FLOW DIA. D
68P-2-1*	1/8	1/16	5/16-24	11/32	1.00	.78	.094
68P-2-10X32*	1/8	10-32	5/16-24	3/8	.86	.64	.094
68P-2-2*	1/8	1/8	5/16-24	7/16	.99	.77	.094
68P-3-1	3/16	1/16	3/8-24	7/16	1.09	.84	.094
68P-3-2*	3/16	1/8	3/8-24	7/16	1.06	.84	.125
68P-3-4*	3/16	1/4	3/8-24	9/16	1.25	1.03	.125
68P-4-1	1/4	1/16	3/8-24	3/8	1.06	.95	.125
68P-4-10X32	1/4	10-32	3/8-24	3/8	.86	.75	.094
68P-4-2	1/4	1/8	3/8-24	7/16	1.06	.95	.125
68P-4-4	1/4	1/4	3/8-24	9/16	1.25	1.14	.125
68P-4-6	1/4	3/8	3/8-24	11/16	1.28	1.17	.125
68P-5-2	5/16	1/8	7/16-24	7/16	1.05	.95	.144
68P-5-4	5/16	1/4	7/16-24	9/16	1.24	1.14	.144
68P-6-2	3/8	1/8	1/2-24	1/2	1.10	.98	.204
68P-6-4	3/8	1/4	1/2-24	9/16	1.29	1.17	.204
68P-6-6	3/8	3/8	1/2-24	11/16	1.29	1.17	.204
68P-8-4	1/2	1/4	11/16-20	11/16	1.46	1.29	.320
68P-8-6	1/2	3/8	11/16-20	11/16	1.37	1.29	.323

*Brass Sleeve, No Tube Support



Tube End Reducer 97P

PART NO.	TUBE O.D.	L	M	C HEX
97P-4-6	3/8 X 1/4	1.718	1.625	.437
97P-6-8	1/2 X 3/8	1.875	1.781	.562




Pipe Coupler Body 391P

(Chrome Plated)

PART NO.	D-INSERT DIA.	PIPE THREAD	C HEX	H	L
391P-4-2	1/4	1/8	1/2	.91	1.29
391P-4-4	1/4	1/4	9/16	.73	1.29
391P-6-4	3/8	1/4	5/8	.85	1.41

Pipe Coupler Body 391PSS


(Stainless Steel)



PART NO.	D INSERT DIA.	PIPE THREAD	L	C HEX	M
391PSS-4-2	1/4	1/8	1.271	.500	.900
391PSS-4-4	1/4	1/4	1.271	.562	.710
391PSS-6-4	3/8	1/4	1.40	.625	.840

Bulkhead Coupler Body 392P


(Chrome Plated)



PART NO.	TUBE SIZE	D-INSERT DIA.	STRAIGHT THREAD	C HEX	P MAX.	H	L	BULKHEAD HOLE DIA.
392P-4-4	1/4	1/4	1/2-24	5/8	.84	.39	2.13	1/2
392P-6-6	3/8	3/8	11/16-24	13/16	.93	.37	2.01	11/16

Bulkhead Coupler Body 392PSS


(Stainless Steel)



PART NO.	TUBE O.D.	BULKHEAD THREAD	L	C HEX	H	P MAX	BULKHEAD HOLE DIA.
392PSS-4-4	1/4	1/2-24	2.03	.625	.28	.84	1/2
392PSS-6-6	3/8	11/16-24	2.20	.812	.31	.93	11/16

Through Type Insert 393P


(Chrome Plated)



PART NO.	TUBE SIZE	D-INSERT DIA.	STRAIGHT THREAD	C SQUARE	H	FLOW DIA. F
393P-4-4	1/4	1/4	3/8-24	7/16	1.12	.125
393P-6-6	3/8	3/8	1/2-24	1/2	1.34	.203

Through Type Insert 393PSS

(Stainless Steel)




PART NO.	TUBE O.D.	D-INSERT DIA.	L	C SQUARE	H	FLOW DIA. F
393PSS-4-4	1/4	1/4	1.677	.500	.99	.125
393PSS-6-6	3/8	3/8	2.030	.500	1.27	.203

Shutoff Type Insert 393PD

(Chrome Plated)


PART NO.	TUBE SIZE	D-INSERT DIA.	STRAIGHT THREAD	C SQUARE	H	FLOW DIA. F
393PD-4-4	1/4	1/4	3/8-24	7/16	1.61	.110
393PD-6-6	3/8	3/8	1/2-24	1/2	1.45	.187



Shut-Off Type Insert 393PDSS

(Stainless Steel)


PART NO.	TUBE O.D.	D-INSERT DIA.	L	C SQUARE	H	FLOW DIA. F
393PDSS-4-4	1/4	1/4	2.46	.500	1.62	.116
393PDSS-6-6	3/8	3/8	2.60	.500	1.67	.157



Single End Shutoff Bulkhead Quick Coupler 394P

(Chrome Plated)


PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	P MAX	H	L	M	BULKHEAD HOLE DIA.	FLOW DIA. F
394P-4-4	1/4	1/2-24	5/8	.84	.39	3.28	2.13	1/2	.125
394P-6-6	3/8	11/16-24	13/16	.93	.37	3.41	2.01	11/16	.203



Coupler Single End Shut-Off Bulkhead 394PSS

(Stainless Steel)


PART NO.	TUBE O.D.	BULKHEAD THREAD	L	M	C HEX	H	P MAX	FLOW DIA. F
394PSS-4-4	1/4	1/2-24	3.05	2.06	.625	.31	.84	.125
394PSS-6-6	3/8	11/16-24	3.50	2.23	.812	.34	.93	.203



Double End Shutoff Bulkhead Quick Coupler 394PD

(Chrome Plated)


PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	P MAX	H	L	M	BULKHEAD HOLE DIA.	FLOW DIA. F
394PD-4-4	1/4	1/2-24	5/8	.84	.39	3.77	2.13	1/2	.125
394PD-6-6	3/8	11/16-24	13/16	.93	.37	3.48	2.01	11/16	.204



Double End Shut-Off Bulkhead Quick Coupler 394PDSS

(Stainless Steel)


PART NO.	TUBE O.D.	BULKHEAD THREAD	L	M	C HEX	H	P H	FLOW DIA. F
394PDSS-4-4	1/4	1/2-24	3.69	2.67	.625	.32	.84	.125
394PDSS-6-6	3/8	11/16-24	3.91	2.24	.812	.34	.93	.203



Single End Shutoff Pipe Connector Quick Coupler 398P

(Chrome Plated)


PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	C HEX	L	M	FLOW DIA. F
398P-4-2	1/4	1/8	3/8-24	1/2	2.45	1.32	.125
398P-4-4	1/4	1/4	3/8-24	9/16	2.45	1.32	.125
398P-6-4	3/8	1/4	1/2-24	5/8	2.80	1.46	.203



Single End Shut-Off Connector Quick Coupler 398PSS

(Stainless Steel)


PART NO.	TUBE O.D.	PIPE THREAD	L	M	C HEX	FLOW DIA. F
398PSS-4-2	1/4	1/8	2.30	1.32	.500	.125
398PSS-4-4	1/4	1/4	2.30	1.32	.562	.125
398PSS-6-4	3/8	1/4	2.70	1.43	.625	.203



A

Double End Shutoff Pipe Connector Quick Coupler 398PD


(Chrome Plated)




PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	C HEX	L	M	FLOW DIA. F
398PD-4-2	1/4	1/8	3/8-24	1/2	2.93	1.31	.125
398PD-4-4	1/4	1/4	3/8-24	9/16	2.93	1.32	.125
398PD-6-4	3/8	1/4	1/2-24	5/8	2.88	1.43	.204

Double End Shut-Off Pipe Connector Quick Coupler 398PDSS

(Stainless Steel)




PART NO.	TUBE O.D.	PIPE THREAD	L	M	C HEX	FLOW DIA. D
398PDSS-4-2	1/4	1/8	2.93	1.31	.500	.125
398PDSS-4-4	1/4	1/4	2.93	1.31	.562	.125
398PDSS-6-4	3/8	1/4	3.10	1.43	.625	.125

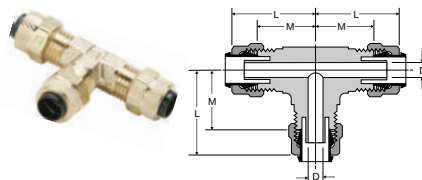

Union Tee 164P

PART NO.	TUBE SIZE	STRAIGHT THREAD	L	M	FLOW DIA. D
164P-2*	1/8	5/16-24	.83	.61	.094
264P-3*	3/16	3/8-24	.83	.61	.125
164P-4	1/4	3/8-24	.84	.73	.125
164P-5	5/16	7/16-24	.83	.73	.144
164P-6	3/8	1/2-24	.98	.86	.203
164P-8	1/2	11/16-20	1.12	1.04	.323


*Brass Sleeve, No Tube Support

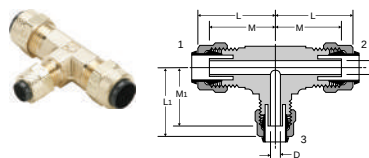

Union Tee 164P combination size


PART NO.	1 TUBE SIZE	2 TUBE SIZE	3 TUBE SIZE	L	L1	M	M1	FLOW DIA. D
164P-6-4	3/8	3/8	1/4	.98	.90	.86	.79	.125

Male Elbow 169P/269P




PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
169P-2-1	1/8	1/16	5/16-24	.88	.63	.69	.094
269P-2-2*	1/8	1/8	5/16-24	.83	.61	.67	.094
169P-3-1*	3/16	1/16	3/8-24	.88	.63	.69	.094
169P-3-2*	3/16	1/8	3/8-24	.83	.61	.69	.125
169P-3-4*	3/16	1/4	3/8-24	.85	.63	.94	.125
169P-4-1	1/4	1/16	3/8-24	.92	.58	.67	.130
169P-4-2	1/4	1/8	3/8-24	.84	.73	.75	.121
169P-4-4	1/4	1/4	3/8-24	.90	.79	.92	.125
169P-4-6	1/4	3/8	3/8-24	.93	.84	1.08	.125
169P-5-2	5/16	1/8	7/16-24	.87	.73	.68	.144
169P-6-2	3/8	1/8	1/2-24	.93	.81	.73	.203
169P-6-4	3/8	1/4	1/2-24	.98	.86	1.05	.203
169P-6-6	3/8	3/8	1/2-24	.98	.86	1.08	.203
169P-8-6	1/2	3/8	11/16-20	1.12	1.04	1.13	.323

*Brass Sleeve, No Tube Support

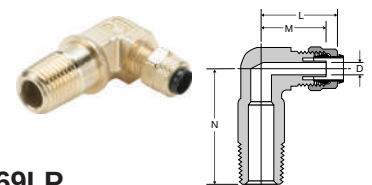


Long Male Elbow 169LP

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
169LP-4-4	1/4	1/4	3/8-24	.90	.79	1.38	.125

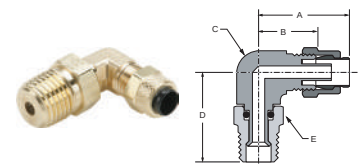


Male Elbow Swivel 169PS

PART NO.	TUBE O.D.	PIPE THREAD	A	B	C HEX	D	E
169PS-4-2	1/4	1/8	.812	.594	.375	.862	.437
169PS-4-4	1/4	1/4	.906	.688	.562	1.218	.562
169PS-6-2	3/8	1/8	.875	.625	.437	.904	.437
169PS-6-4	3/8	1/4	.937	.685	.562	1.218	.562
169PS-6-6	3/8	3/8	.859	.602	.562	1.190	.687
169PS-8-6	1/2	3/8	1.031	.782	.500	1.218	.687


**Female Elbow 170P**

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
170P-2-2*	1/8	1/8	5/16-24	.91	.69	.56	.094
170P-3-2*	3/16	1/8	3/8-24	.91	.69	.56	.125
170P-4-2	1/4	1/8	3/8-24	.90	.79	.56	.125
170P-4-4	1/4	1/4	3/8-24	1.00	.89	.69	.125
170P-6-4	3/8	1/4	1/2-24	1.01	.89	.69	.204
170P-8-6	1/2	3/8	11/16-20	1.19	1.11	1.13	.323

*Brass Sleeve, No Tube Support

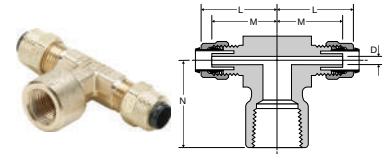
**Female Branch Tee 177P**

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
177P-4-2	1/4	1/8	3/8-24	.92	.81	.88	.125
177P-4-4	1/4	1/4	3/8-24	.92	.81	1.03	.125
177P-4-6	1/4	3/8	3/8-24	1.03	.92	1.13	.125

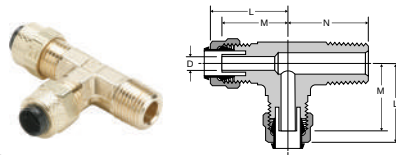
**Male Run Tee 171P**

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
171P-2-2*	1/8	1/8	5/16-24	.82	.60	.67	.094
171P-3-2*	3/16	1/8	3/8-24	.82	.60	.67	.125
171P-4-2	1/4	1/8	3/8-24	.84	.73	.72	.125
171P-4-4	1/4	1/4	3/8-24	.92	.81	.92	.125
171P-5-2	5/16	1/8	7/16-24	.83	.73	.72	.144
171P-6-4	3/8	1/4	1/2-24	.98	.86	1.03	.203
171P-8-6	1/2	3/8	11/16-20	1.12	1.04	1.13	.323

*Brass Sleeve, No Tube Support


**Needle Valve NV311P**

PART NO.	TUBE SIZE	PIPE THREAD	H	L OPEN	L CLOSED	M	N
NV311P-4-2	1/4	1/8	1.06	1.36	1.16	.64	.63
NV311P-4-4	1/4	1/4	1.06	1.38	1.18	.64	.72
NV311P-6-4	3/8	1/4	1.06	1.38	1.18	.64	.72

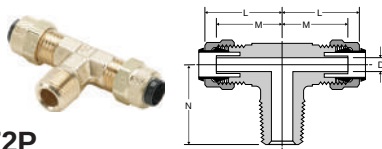**Male Branch Tee 172P**

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
172P-2-2*	1/8	1/8	5/16-24	.82	.60	.67	.094
172P-3-2*	3/16	1/8	3/8-24	.82	.60	.67	.125
172P-4-2	1/4	1/8	3/8-24	.84	.73	.72	.125
172P-4-4	1/4	1/4	3/8-24	.92	.81	.92	.125
172P-5-2	5/16	1/8	7/16-24	.83	.73	.72	.144
172P-6-2	3/8	1/8	1/2-24	.88	.86	.74	.204
172P-6-4	3/8	1/4	1/2-24	.98	.86	1.03	.204
172P-8-6	1/2	3/8	11/16-20	1.12	1.04	1.13	.323

*Brass Sleeve, No Tube Support

**Angle Needle Valve NV312P**

PART NO.	TUBE SIZE	PIPE THREAD	H	L OPEN	L CLOSED	M	N
NV312P-4-2	1/4	1/8	1.06	1.70	1.50	.63	.68
NV312P-4-4	1/4	1/4	1.06	2.07	1.82	.71	.86
NV312P-6-4	3/8	1/4	1.06	2.00	1.75	.74	.86



A

Hi-Duty Flareless Tube Fittings

MATERIALS OF CONSTRUCTION	
FITTING:	BRASS
NUT:	BRASS
SLEEVE:	BRASS

NOMENCLATURE	
EXAMPLE: 169HD-6-4	ATTRIBUTE:
1	FORGING
69	MALE ELBOW
HD	HI-DUTY
6	3/8" TUBE O.D.
4	1/4" PIPE THREAD

APPLICABLE TUBE	
TUBE MATERIAL:	- COPPER, BRASS, SEAMLESS STEEL, THERMOPLASTIC TUBING - STEEL TUBING MUST BE COLD DRAWN AND ANNEALED SEAMLESS LOW-CARBON PER SAE J524 WITH A MAXIMUM HARDNESS OF ROCKWELL B 65.
TUBE O.D.:	1/8, 3/16, 1/4, 5/16, 3/8, 1/2, 5/8

MAXIMUM RECOMMENDED WORKING PRESSURE	
TUBE O.D.	PSI
1/8	4,300
3/16	2,850
1/4	2,100
5/16	1,800
3/8	1,500
1/2	1,150
5/8	1,000

SPECIFICATIONS	
OPERATING FLUID:	WATER, AIR, INERT AND NON-COMBUSTIBLE GASSES COMPATIBLE WITH MATERIALS OF CONSTRUCTION
NOTE:	FOR OTHER TYPES OF FLUIDS OR GASSES, PLEASE CONSULT FACTORY




A preassembled brass fitting, with sleeve machined onto nut. During assembly sleeve breaks away from nut and creates a seal on the tubing. No flaring, soldering or other tube preparation of tubing is necessary.

Assembly Instructions


1. Cut tube squarely and cleanly removing all burrs.
2. Grasp fitting. Do not remove nut.
3. Insert tube in fitting through nut until tube seats firmly against tube shoulder in body.
4. Grip tube firmly to prevent turning and tighten nut to finger-tight. Continue to tighten nut for one and three-quarter additional turns (one and one-half turns for 1/2" size tube fittings) for a positive, leak proof seal. During tightening a slight "give" will be felt. This "give" indicates the sleeve has been sheared from the nut. It is not necessary to tighten the nut all the way down.

Bulkhead Union 62HDBH




PART NO.	TUBE SIZE	MIN. ORIFICE SIZE	A	B	C	D	E
62HDBH-2	1/8	.093	1.781	1.156	.562	.625	7/16-24
62HDBH-4	1/4	.187	1.968	1.156	.687	.625	9/16-24

Union Elbow 165HD




PART NO.	TUBE SIZE	MIN. ORIFICE SIZE	A	B	C HEX
165HD-4	1/4	.187	1.084	.690	.552
165HD-6	3/8	.312	1.376	.970	.615
165HD-8	1/2	.437	1.546	1.060	.750

Nut/Sleeve 61HD




PART NO.	TUBE SIZE	PIPE THREAD	A	C
61HD-2	1/8	5/16-24	.656	.312
61HD-3	3/16	3/8-24	.687	.375
61HD-4	1/4	7/16-24	.734	.437
61HD-5	5/16	1/2-20	.765	.500
61HD-6	3/8	9/16-20	.843	.562
61HD-8	1/2	1 1/16-16	.921	.688
61HD-10	5/8	7/8-18	1.078	.875

Female Connector 66HD




PART NO.	TUBE SIZE	PIPE THREAD	MIN. ORIFICE SIZE	A	B	C HEX
66HD-2-2	1/8	1/8	.093	1.312	1.000	.500
66HD-4-2	1/4	1/8	.187	1.406	1.000	.562
66HD-4-4	1/4	1/4	.187	1.593	1.187	.687
66HD-6-2	3/8	1/8	.312	1.531	1.125	.625
66HD-6-4	3/8	1/4	.312	1.718	1.312	.625
66HD-6-6	3/8	3/8	.312	1.750	1.343	.812

Union 62HD




PART NO.	TUBE SIZE	MIN. ORIFICE SIZE	A	B	C
62HD-2	1/8	.093	1.687	1.062	.375
62HD-3	3/16	.125	1.781	1.031	.437
62HD-4	1/4	.187	1.906	1.093	.562
62HD-6	3/8	.312	2.187	1.375	.625
62HD-8	1/2	.437	2.437	1.562	.812
62HD-10	5/8	.500	2.937	1.812	1.062

Reducing Union 62HD



PART NO.	TUBE SIZE	MIN. ORIFICE SIZE	A	B	C HEX
62HD-6-4	3/8 X 1/4	.187	2.000	1.187	.625
62HD-8-4	1/2 X 1/4	.187	2.125	1.281	.812
62HD-8-6	1/2 X 3/8	.312	2.656	1.406	.812


Union Tee 164HD

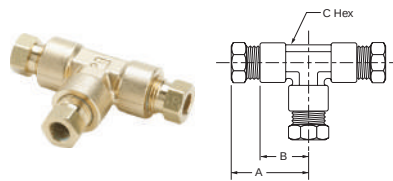


PART NO.	TUBE SIZE	MIN. ORIFICE SIZE	A	B	C HEX
164HD-4	1/4	.187	1.082	.687	.500
164HD-6	3/8	.312	1.357	.970	.562
164HD-8	1/2	.437	1.481	1.060	.750

A

Male Connector 68HD




PART NO.	TUBE SIZE	PIPE THREAD	MIN. ORIFICE SIZE	A	B	C HEX
68HD-2-2	1/8	1/8	.093	1.062	.750	.437
68HD-3-2	3/16	1/8	.125	1.140	.765	.437
68HD-4-2	1/4	1/8	.187	1.343	.937	.562
68HD-4-4	1/4	1/4	.187	1.468	1.062	.562
68HD-4-6	1/4	3/8	.187	1.343	.937	.687
68HD-4-8	1/4	1/2	.187	1.531	1.125	.875
68HD-5-2	5/16	1/8	.218	1.406	1.000	.562
68HD-5-4	5/16	1/4	.218	1.500	1.093	.562
68HD-6-2	3/8	1/8	.218	1.531	1.125	.625
68HD-6-4	3/8	1/4	.312	1.656	1.250	.625
68HD-6-6	3/8	3/8	.312	1.531	1.125	.687
68HD-6-8	3/8	1/2	.312	1.531	1.125	.875
68HD-8-4	1/2	1/4	.312	1.813	1.375	.812
68HD-8-6	1/2	3/8	.406	1.750	1.312	.812
68HD-8-8	1/2	1/2	.437	1.812	1.375	.875
68HD-8-12	1/2	3/4	.437	1.625	1.187	1.062
68HD-10-6	5/8	3/8	.406	2.031	1.468	1.062
68HD-10-8	5/8	1/2	.500	2.156	1.593	1.062




Male Elbow 169HD

PART NO.	TUBE SIZE	PIPE THREAD	MIN. ORIFICE SIZE	A	B	C HEX	D
169HD-2-2	1/8	1/8	.093	.975	.656	.438	.720
169HD-3-2	3/16	1/8	.125	1.056	.687	.437	.750
169HD-4-2	1/4	1/8	.187	1.084	.687	.500	.750
169HD-4-4	1/4	1/4	.187	1.144	.750	.500	.937
169HD-5-2	5/16	1/8	.218	1.144	.750	.562	.810
169HD-5-4	5/16	1/4	.250	1.206	.812	.562	1.000
169HD-6-2	3/8	1/8	.218	1.281	.875	.562	.875
169HD-6-4	3/8	1/4	.312	1.281	.875	.562	1.000
169HD-6-6	3/8	3/8	.312	1.376	.970	.615	1.031
169HD-6-8	3/8	1/2	.312	1.526	1.120	.687	1.310
169HD-8-4	1/2	1/4	.312	1.421	1.000	.678	1.062
169HD-8-6	1/2	3/8	.406	1.421	1.000	.678	1.062
169HD-8-8	1/2	1/2	.437	1.481	1.060	.740	1.420
169HD-10-6	5/8	3/8	.406	1.818	1.270	.875	1.340
169HD-10-8	5/8	1/2	.500	1.818	1.270	.875	1.480

Female Elbow 170HD




PART NO.	TUBE SIZE	PIPE THREAD	MIN. ORIFICE SIZE	A	B	C HEX	D
170HD-2-2	1/8	1/8	.093	1.005	.690	.500	.750
170HD-4-2	1/4	1/8	.187	1.084	.687	.500	.750
170HD-4-4	1/4	1/4	.187	1.234	.843	.562	.875
170HD-6-2	3/8	1/8	.312	1.281	.875	.562	.937
170HD-6-4	3/8	1/4	.312	1.376	.970	.615	1.093
170HD-6-6	3/8	3/8	.312	1.526	1.120	.690	1.150
170HD-8-6	1/2	3/8	.437	1.481	1.062	.740	1.281

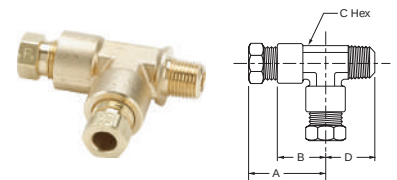


Male Run Tee 171HD

PART NO.	TUBE SIZE	PIPE THREAD	MIN. ORIFICE SIZE	A	B	C HEX	D
171HD-4-2	1/4	1/8	.187	1.144	.750	.500	.780
171HD-4-4	1/4	1/4	.187	1.207	.812	.500	.937
171HD-6-4	3/8	1/4	.312	1.376	.970	.562	1.000

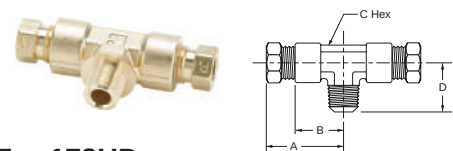


Male Branch Tee 172HD

PART NO.	TUBE SIZE	PIPE THREAD	MIN. ORIFICE SIZE	A	B	C HEX	D
172HD-4-2	1/4	1/8	.187	1.082	.687	.500	.780
172HD-4-4	1/4	1/4	.187	1.269	.875	.500	.937
172HD-6-6	3/8	3/8	.312	1.406	1.000	.562	1.125

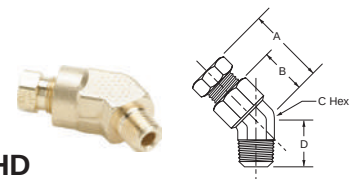


45° Male Elbow 179HD

PART NO.	TUBE SIZE	PIPE THREAD	MIN. ORIFICE SIZE	A	B	C HEX	D
179HD-4-2	1/4	1/8	.187	1.093	.687	.562	.750
179HD-6-4	3/8	1/4	.280	1.138	.710	.550	.850



Female Branch Tee 177HD

PART NO.	TUBE SIZE	PIPE THREAD	MIN. ORIFICE SIZE	A	B	C HEX	D
177HD-4-2	1/4	1/8	.187	1.082	.687	.500	.750
177HD-4-4	1/4	1/4	.187	1.144	.750	.562	1.093
177HD-6-4	3/8	1/4	.312	1.376	.970	.562	1.093



Plug 59HD

PART NO.	TUBE SIZE	A	C
59HD-4	1/4	.734	.437
59HD-6	3/8	.843	.625

A

Notes

[illegible]